


APPLICATION PROCEDURE & SAFETY CONSIDERATIONS **PREFORMED LINE PRODUCTS**

ARMOR-GRIP® Suspension



NOVEMBER 1996

Completely read and understand this procedure before applying product. Special attention should be given to the Safety Considerations located on the last page. We advise the reader to review those considerations now, and then again during the general review of this procedure.

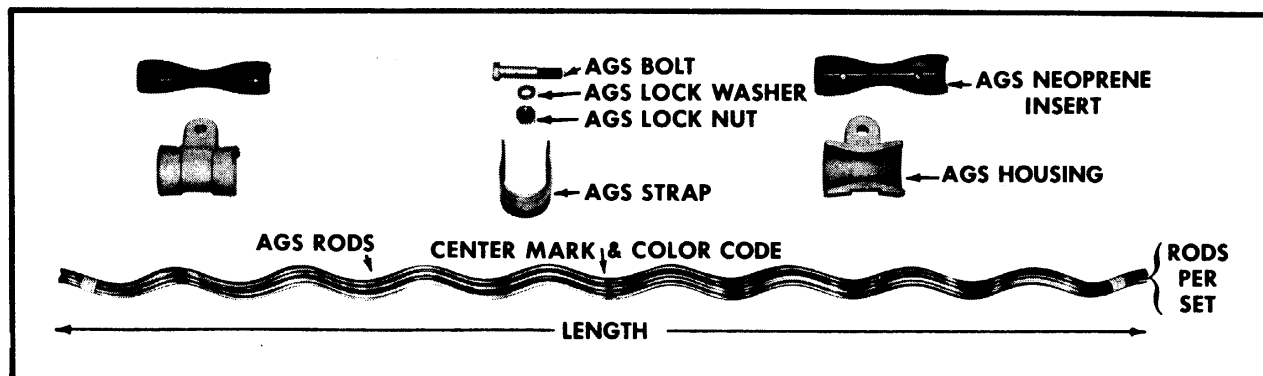


1. ARMOR-GRIP® Suspension nomenclature.



2. Plumb insulator string and mark conductor at center of sheave. Use felt marking pen or lumber crayon; do not scratch conductor. Lift the conductor beyond the ends of the rods to allow enough clearance for the application.




3. Align center marks of AGS Neoprene Inserts with center mark on conductor and tape in place with a thin layer of tape.

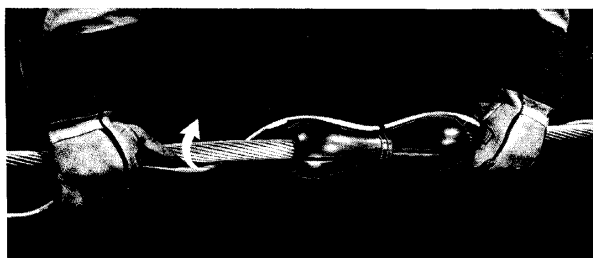


4. Center the AGS Rod on the insert. Apply sufficient length of rod (approximately two wraps) so that it will stay on the conductor.

DO NOT DISTORT RODS.

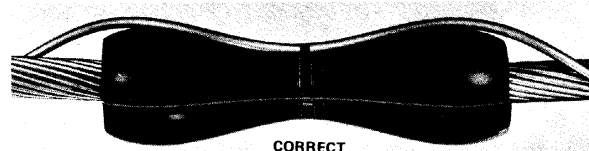


CORRECT

5. A. Proper application of one rod. The curvature of the rod follows the contour of the neoprene insert. **MAKE CERTAIN THAT THERE IS NO SPACE BETWEEN THE ROD AND INSERT.**

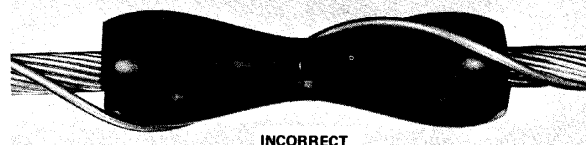


INCORRECT


- B. Improper application of one rod. **DO NOT WRAP ROD AROUND THE NEOPRENE INSERT AS SHOWN.**

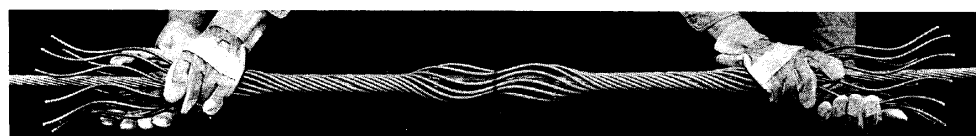


6. Apply all remaining rods evenly around neoprene insert. **MAKE SURE THAT NO RODS ARE CROSSED.** Each AGS Rod can be applied completely, or all rods can be applied partially as shown above. Make sure that all rod ends are snapped into place.

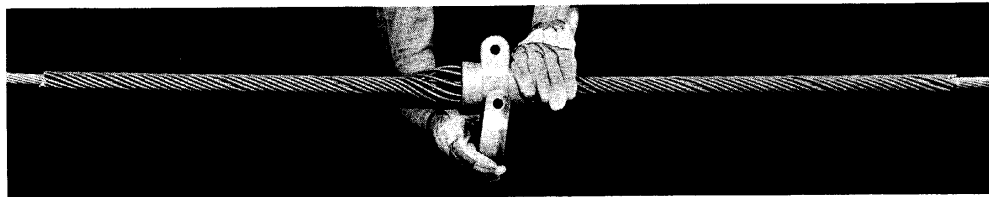

7. Place the two halves of the AGS Housing on either side of the center assembly. Slide the AGS Strap into position and with the heel of the hand tap firmly into place.

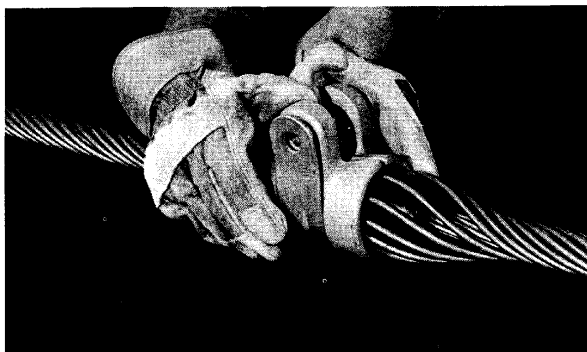

8. Spread the ears of the housing and tap strap into place again. This will align the holes so that the bolt may be inserted easily.

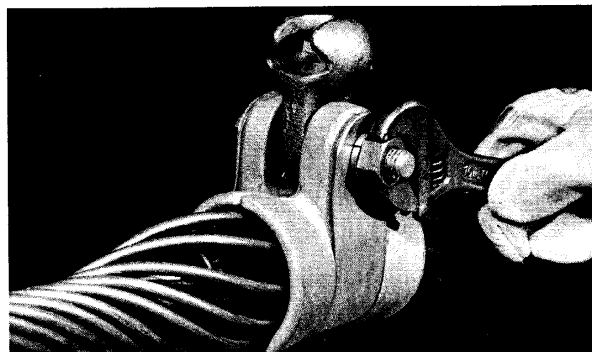

9. Tighten the nut until the lock washer becomes almost flat. DO NOT OVER-TIGHTEN. DO NOT SQUEEZE EARS OF AGS HOUSING AGAINST FITTING.

GENERAL NOTES

1. ARMOR-GRIP® Suspension Rods are precision devices. To insure a tight assembly, they should be stored and handled carefully. To prevent distortion and damage, they should be installed as illustrated.
2. ARMOR-GRIP® Suspension Rods are NOT interchangeable with standard Armor Rods.
3. On some sizes of ARMOR-GRIP® Suspension there will appear to be enough gap between rods to apply an additional rod... BUT... all AGS Rods are packed in sets. Apply only the number of rods in the set.
4. Maximum line angle of deviation:
 - a. The single support ARMOR-GRIP® Suspension may be used on line angles up through 30°.
 - b. Use the double support ARMOR-GRIP® Suspension for line angles between 30° and 60°. Consult the Factory for an engineering recommendation regarding this application.
5. ARMOR-GRIP® Suspension Rods are factory matched; do not intermix rods from different sets.
6. Do not reverse rods end to end in any one set; that is, do not flip end over end.
7. The alignment of the rods should be maintained within 2 inches for voltages of 230 KV and lower; for 345 KV and above, the alignment of the ends of the rods should be maintained within ¾-inch.

SAFETY CONSIDERATIONS


1. This application procedure is not intended to supersede any company construction or safety standards. This procedure is offered only to illustrate safe application for the individual. **CAUTION: FAILURE TO FOLLOW THESE PROCEDURES AND RESTRICTIONS MAY RESULT IN PERSONAL INJURY OR DEATH.**
2. The rods of this product are intended for a single (one-time) use and for the specified application. However, the hardware components may be reused as desired if in good condition. **CAUTION: DO NOT REUSE RODS OR MODIFY THIS PRODUCT UNDER ANY CIRCUMSTANCES.**
3. This product is intended for use by trained craftspeople only.
4. This product **SHOULD NOT BE USED** by anyone who is not familiar with and trained in the use of it.
5. When working in the area of energized lines with this product, **EXTRA CARE** should be taken to prevent accidental electrical contact.
6. For **PROPER PERFORMANCE AND PERSONAL SAFETY** be sure to select the proper size PREFORMED™ product before application.
7. PREFORMED products are precision devices. To insure proper performance, they should be stored in cartons under cover and handled carefully.

PREFORMED LINE PRODUCTS 

P.O. Box 91129, Cleveland, Ohio 44101 • 440.461.5200 • www.preformed.com • e-mail: inquiries@preformed.com

SP2062-1

Litho in U.S.A.

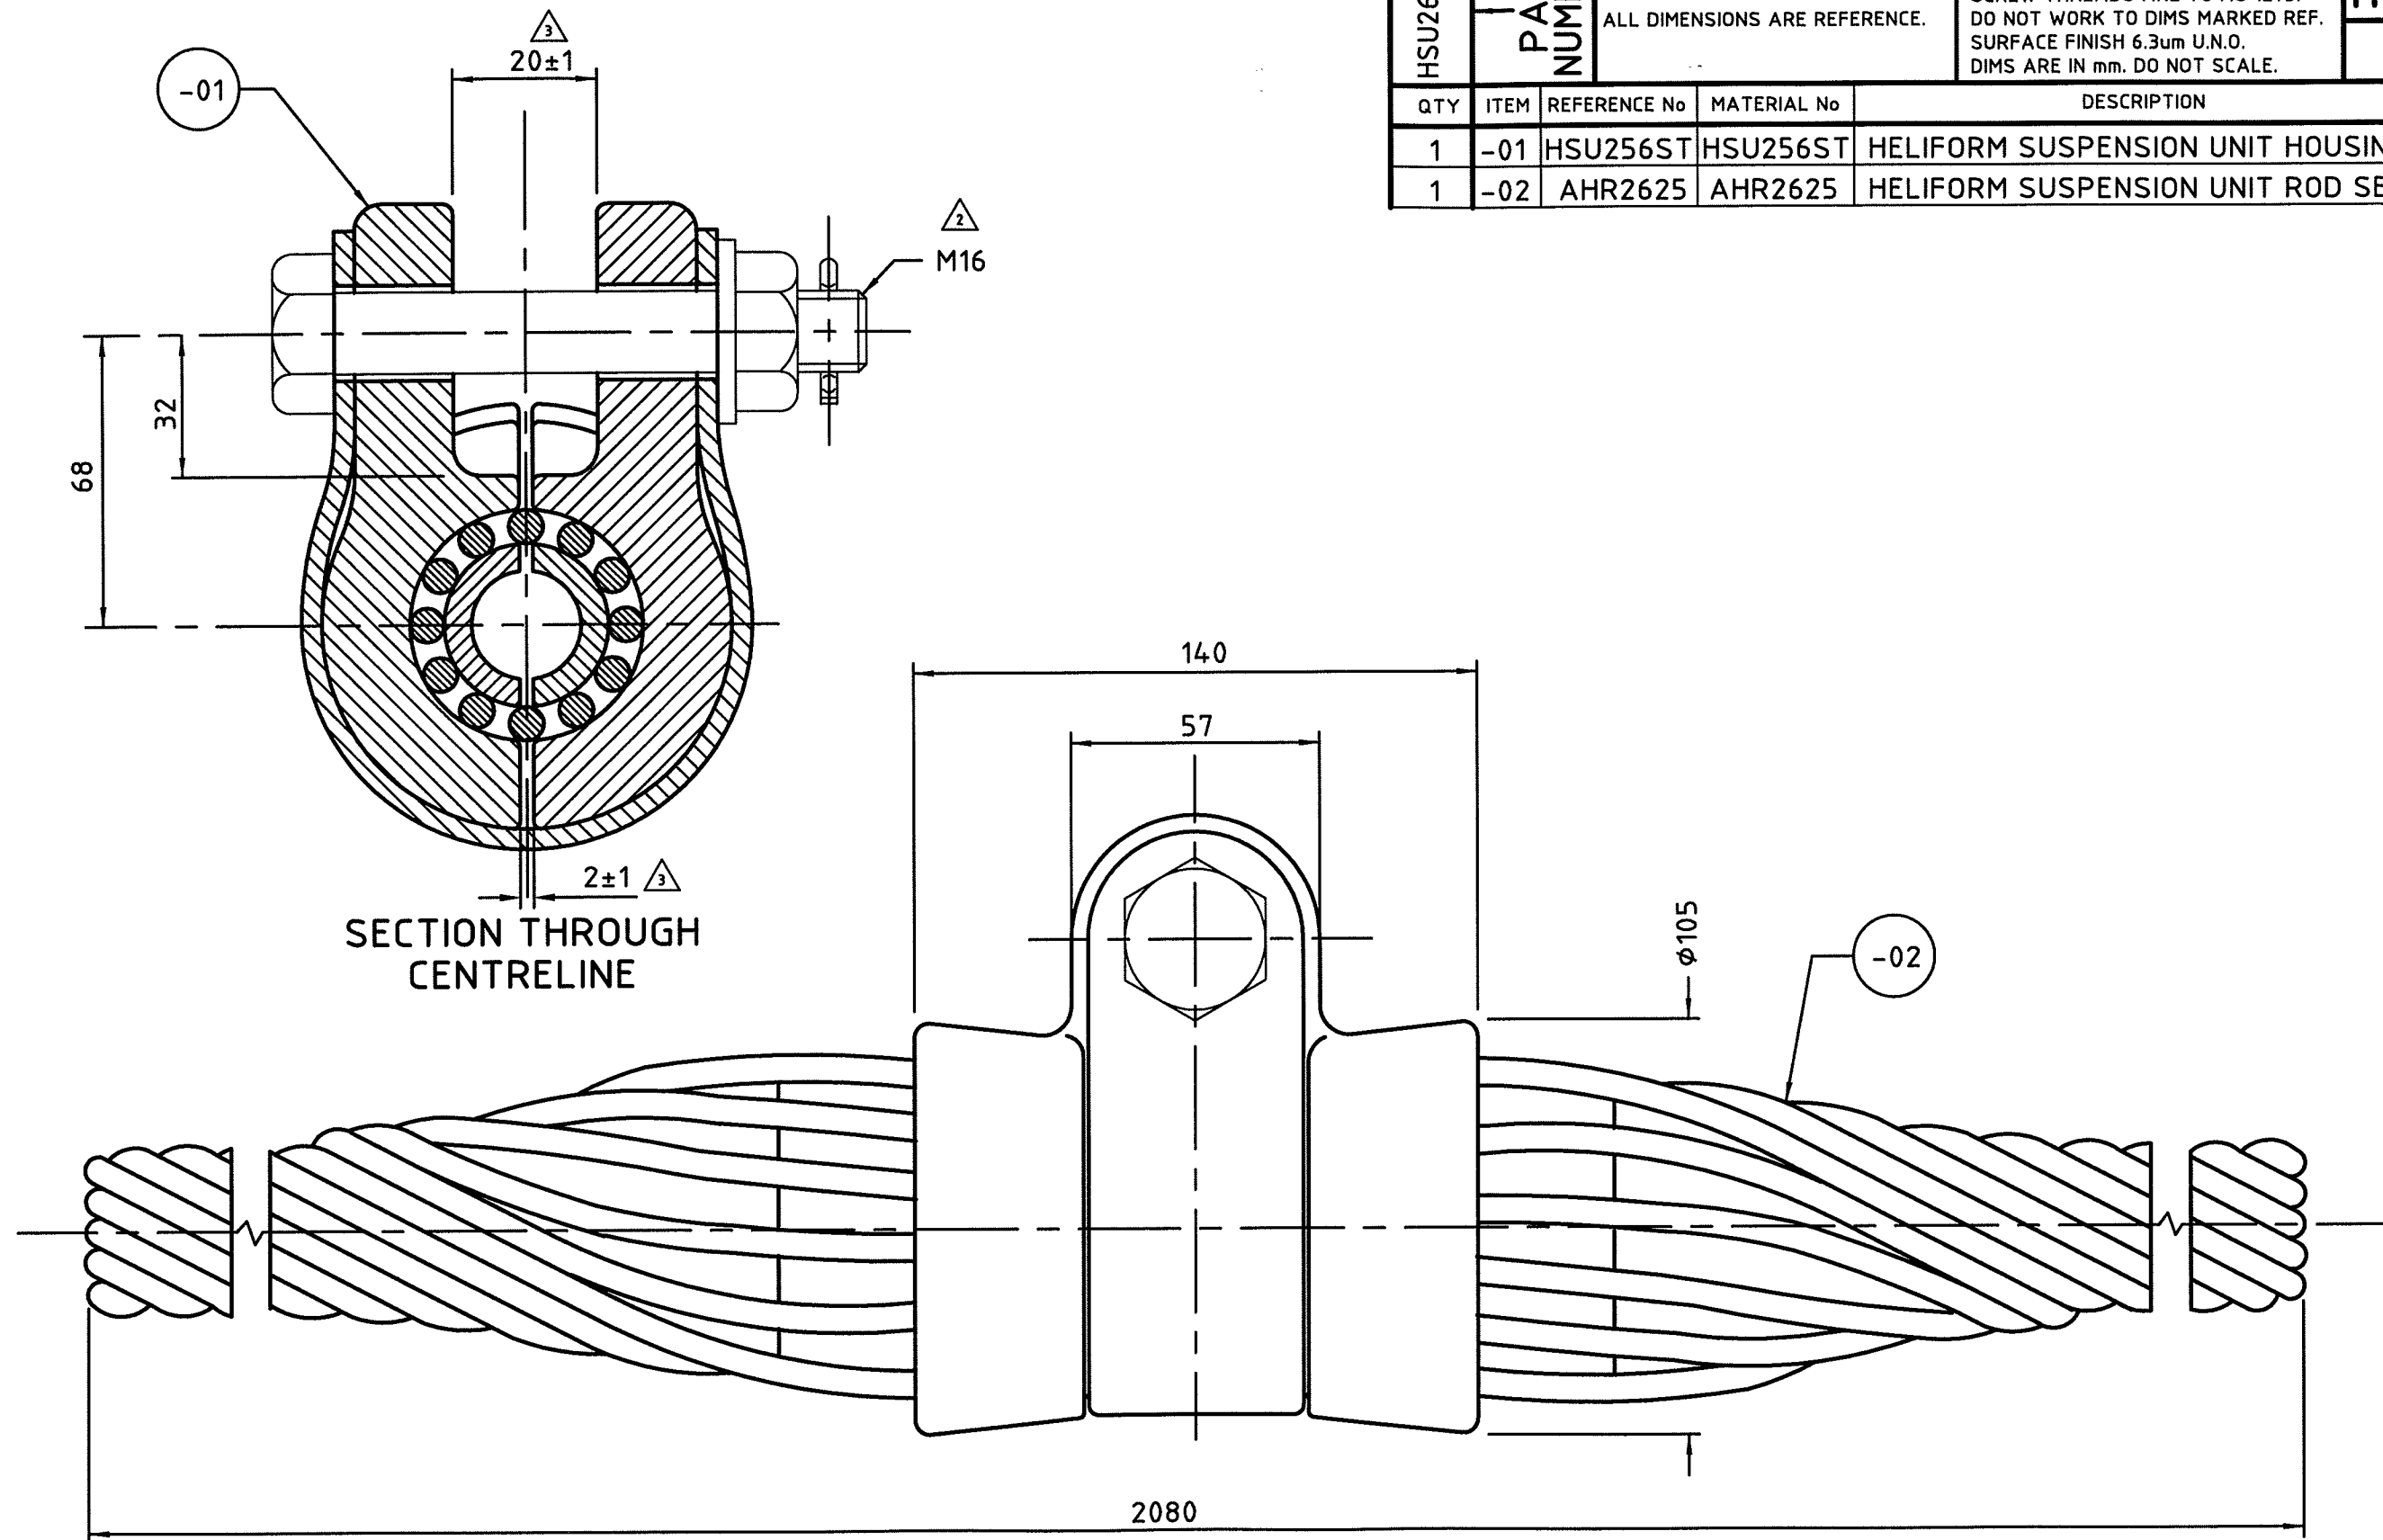

HSU2625	PART NUMBER	<u>IMPLIED TOLERANCES</u>		<u>IMPLIED NOTES</u>		A3 DRAWING No
		ALL DIMENSIONS ARE REFERENCE.		BURRS AND SHARP EDGES REMOVED. SCREW THREADS ARE TO AS 1275. DO NOT WORK TO DIMS MARKED REF. SURFACE FINISH 6.3um U.N.O. DIMS ARE IN mm. DO NOT SCALE.		HSU2625
QTY	ITEM	REFERENCE No	MATERIAL No	DESCRIPTION		
1	-01	HSU256ST	HSU256ST	HELIFORM SUSPENSION UNIT HOUSING ASSY.		
1	-02	AHR2625	AHR2625	HELIFORM SUSPENSION UNIT ROD SET AL.		

NOTICE
THIS DOCUMENT AND THE INFORMATION HEREON IS THE PROPERTY OF DULMISON OR ITS SUCCESSORS. IT MUST NOT BE USED IN ANY WAY DETRIMENTAL TO OUR INTERESTS NOR DISCLOSED TO A THIRD PARTY WITHOUT THE WRITTEN CONSENT OF DULMISON.

ISSUES	2	3
ELCO 7593		
M16 WAS 16B 19L 1-97		
T.P. 15-06-2004		
DIM 20±1 WAS 25		
DIM 2±1 ADDED		

SUPERSEDES DRG
HSU2700M
REFERENCE

**HELIFORM SUSPENSION
UNIT ASSY M16 BOLT
RANGE 25.55-26.44**



P.O. Box 156 WYONG
N.S.W. 2259.
Phone: 043 531211
Fax: 043 532470

DRAWN	D.W.	DATE	15-5-97
CHECKED		SCALE	N.T.S.
APPROVED		PROJECTION	3RD ANGLE
CAD	A3	DRAWING No	
AUTO CAD		HSU2625	

PLP (AUSTRALIA) PTY LTD
ENGINEERING DEPARTMENT

DATE – 21ST September 2017

TYPE TEST REPORT NO. T9753
TEST REFERENCE NO. T17/20
PAGE 1 of 6

MECHANICAL STRENGTH TYPE TEST

ON:

HELIFORM SUSPENSION UNIT ASSEMBLY
M20 BOLT RANGE 25.55-26.44mm

PART NO: D-HSU262520

Testing Officer:  (Jose-Elmer Simeon)

Approved by:  (Florian de Celis, Compliance Manager)

Date Approved: 

190 Power Street Glendenning NSW 2761 AUSTRALIA
Phone: 8805 0000, INT'L (612) 8805 0000
Fax: 8805 0090, INT'L (612) 8805 0090

THE QUALITY SYSTEM OF PLP AUSTRALIA HAS BEEN CERTIFIED TO
AS/NZS ISO9001:2015 BY GLOBAL MARK REGISTER QUALITY ASSURANCE

Fittings and Accessories for Power and Communication.
Engineered Plastics and Extrusions.
Data Communication Products.