


Riser Cable Support

NOMENCLATURE

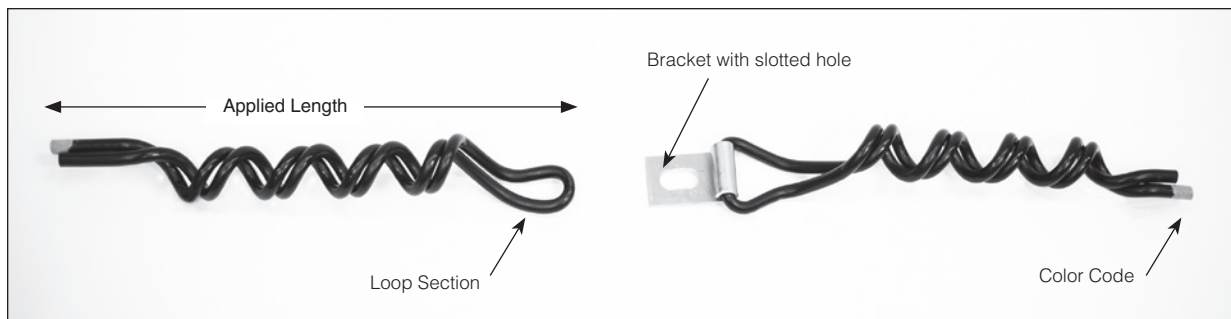

Applied Length: Assists in identification of conductor size, corresponding to tabular information appearing on catalog pages.

Color Code: Assists in identification of conductor size, corresponding to tabular information appearing on catalog pages.

Since the COATED TOP TIES are all black, where an insulator or conductor code normally would be black, no additional black mark is applied to the COATED TOP TIES.

GENERAL RECOMMENDATIONS

Intended Use: The Riser Cable Support is intended to be used on conductor that is transitioning from underground to overhead where the cable needs to be secured to the pole above the conduits. The Riser Cable Support holds the weight of the cable during this transition.

Material: Riser Cable Supports are made from a UV stabilized PVC material built to sustain strength and durability while exposed to extensive sunlight over time.

The Riser Cable Support is designed to permit controlled and limited movement of unbroken cable and under certain conditions, return the cable to its originally installed position. The ability of the support to give and return under differential loading conditions is called “resiliency” and is designed into each Riser Cable Support.

SAFETY CONSIDERATIONS

1. This product is intended for a single (one-time) use and for the specified application. CAUTION: DO NOT REUSE OR MODIFY THIS PRODUCT UNDER ANY CIRCUMSTANCES.
2. This product is intended for use by trained craftspeople only. This product SHOULD NOT BE USED by anyone who is not familiar with and trained in the use of it.
3. When working in the area of energized lines with this product, EXTRA CARE should be taken to prevent accidental electrical contact.
4. For PROPER PERFORMANCE AND PERSONAL SAFETY be sure to select the proper size PREFORMED™ Riser Cable Support before application.
5. PREFORMED Riser Cable Supports are precision devices. To ensure proper performance, they should be stored in cartons under cover and handled carefully.



Riser Cable Support

**For use on:
Riser Cable**



Catalog Number		Cable Range	Units	Wt./Lbs.	Length (in.)	Color Code
Bracket	No Bracket		Per Carton			
RCS-0416	RCS-0416N	.296 - .400	50	18	16	White
RCS-0417	RCS-0417N	.401 - .560	50	19	16	Green
RCS-0418	RCS-0418N	.561 - .720	50	21	16	Blue
RCS-0419	RCS-0419N	.721 - .920	50	22	17	Orange
RCS-0420	RCS-0420N	.921 - 1.130	50	24	18	Red
RCS-0421	RCS-0421N	1.131 - 1.500	50	30	20	Black
RCS-0422	RCS-0422N	1.501 - 1.810	50	34	22	Pink
RCS-0423	RCS-0423N	1.811 - 2.100	50	38	22	White
RCS-0424	RCS-0424N	2.000 - 2.600	50	45	25	Green
RCS-0425	RCS-0425N	2.500 - 3.100	50	50	27	Blue

Riser Cable Supports are left hand lay standard.

EXPLANATORY NOTES:

- (1) Diameter Range indicates the size of conductors that utilize the same tie.