


SIDE-OF-POLE (SPM) SELECTION GUIDE



SELECTION GUIDE INSTRUCTIONS:

- Determine Module Series by matching dimensions to size range (left column, below).
- Select number of modules to mount (move across chart)
NOTE - SPM Configuration block, which includes the pole size, layout and price.
- Determine Side of Pole Mount part number to order using **Ordering Guidelines Block** (to the right) or visit www.preformed.com for SPM online configuration tool. Refer to **Options** page on back for more details.

Ordering Guideline SPM4-D-HWV-AA



***IMPORTANT:** Include module manufacturer's specification sheet with PO

TPM Configuration Key

3-4.5" OD ← Outside Diameter (OD)
Range of Mounting Pipe

4h x 1w-L ← Array Layout and Module Orientation (P=Portrait, L=Landscape)

NOTE: Based on standard design – 90 mph, Exposure C.


Module Size Range (W x L)	PLP Module Series	Number of Modules			
		1	2	3	4
20-26" x 39-53"	B	2-3.5" OD 1hx1w-L	2-3.5" OD 1hx1w-L	3-4.5" OD 3hx1w-L	3-4.5" OD 4hx1w-L
22-27" x 56-63"	C	2-3.5" OD 1hx1w-L	2-3.5" OD 1hx1w-L	3-4.5" OD 3hx1w-L	3-4.5" OD 4hx1w-L
31-33" x 60-67"	D	2-3.5" OD 1hx1w-L	3-4.5" OD 2hx1w-L	3-4.5" OD 3hx1w-L	3-4.5" OD 4hx1w-L
37-42" x 51-67"	G	2-3.5" OD 1hx1w-L	3-4.5" OD 2hx1w-L	3-4.5" OD 3hx1w-L	N/A
38-42" x 67-82"	H	2-3.5" OD 1hx1w-L	3-4.5" OD 2hx1w-L	3-4.5" OD 3hx1w-L	N/A
50-52" x 65-79"	I	2-3.5" OD 1hx1w-L	3-4.5" OD 2hx1w-L	N/A	N/A

SIDE-OF-POLE MOUNTING OPTIONS SELECTION GUIDE

Instructions: Add Options to the end of SPM part number in the order listed below

Part Suffix	Description
HWV	High Wind Version
TRH	Tamper Resistant Hardware for Module Mounting
PCA	Powder Coated Aluminum Components
AA	Anodized Aluminum Components
2-6IN	Band Clamp upgrade for 2-6" OD pipe
6-12IN	Band Clamp upgrade for 6-12" OD pipe

Ordering Guideline
SPM4-D-HWV-AA

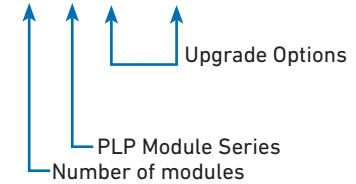

***Important:** Include module manufacturer's specification sheet with PO

HWV	High Wind Version for 130 MPH, Exposure C Wind Zone
------------	--

Finish Upgrades	
PCA	Powder Coated Aluminum Components
AA	Anodized Aluminum Components

Powder Coated Steel Components Standard as of July 2016.

TRH	Tamper Resistant Hardware for Module Mounting - TRH Package includes stainless steel pin-in-hex machine screws with nylon-insert lock nuts and matching hex-key
------------	--

Stainless Steel Hardware is now standard.

Band Clamp Upgrades			
Standard OD Range of Mounting Pipe		3-6"	6-12"
	2-3.5"	6"	12"
	3-4.5"	6"	12"



GLOBAL HEADQUARTERS
660 BETA DRIVE
CLEVELAND, OHIO 44143 USA

+1 440 461 5200
FAX: +1 440 442 8816
INFO@PLPSOLAR.COM
PLP.COM

© 2021 PREFORMED LINE PRODUCTS
SL-PL-1001-6
10.21.00