



Tri-Seal Closure



The Tri-Seal is designed for butt splice and/or subsurface terminal use. It can be used where the exact number of service connections are to be made on a continuing basis such as a new or developing residential area or mobile home park.

Flexibility is provided by a unique oval port and two additional side ports allowing re-entry of additional cables or service wires.

Features:


- Quickly and easily applied
- Seals out moisture and corrosion
- Unaffected by soil conditions, even where acid and alkali prevail
- Clear cap is available for hand holes and allows visual inspection
- Kit comes complete

Catalog No. 8000565 shown here

1. Base (two hose clamps included)
2. Clear cap
3. Resin mixer
4. Polyurethane resin
5. Application procedure
6. Pair Protectors
7. Emery cloth (for scuffing sheath)
8. Cable bonding braid
9. SURE-GRIP™ Shield Connectors
10. Sealing tape
11. Service wire bond connectors
12. Funnel
13. Gasket
14. Gloves (not shown)



CAPACITY
 Any number of wires and cables or service wires with a total bundle diameter of 3.5" (89 mm). Each side port will accommodate a single cable or group of service wires up to 1/2" (13 mm).

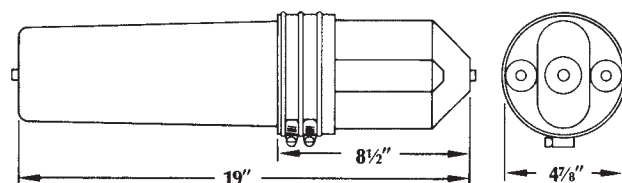

Catalog Number	Description	Standard Carton Qty.
8000565	Tri -Seal complete with resin and bonding	2 Kits
8000566	Tri-Seal base and cap only with air flange no resin or bonding	2 Kits
8000568	Tri-Seal complete with resin without cable bonding	2 Kits
8000574	Tri-Seal with connector block mounting bar	2 Kits