




Telegrip

Telegrip

Telegrips are designed for service drop applications of coaxial cables. Flexible but firm, Telegrips exceed mechanical holding requirements for coaxial cable. The long length design reduces stress levels and eliminates the possibility of crushing the cable or affecting its dielectric properties. Also, its unique gripping principle prevents bending that can cause "snow" or distortion of the television picture.

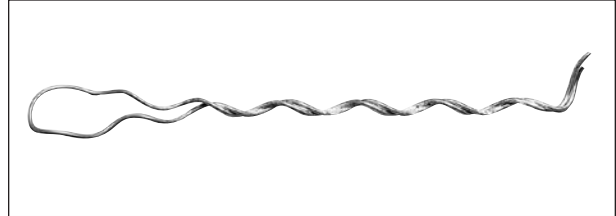

Telegrip			
Catalog Number	Cable Type (mm)	Units Per Carton	Wt/Lbs Per Carton
DE-1500	.242" (6) RG59/U .275" (7) RG6/U	500	23
DE-1600	.242" X .504" (6 x 13) DUAL RG59U	500	25
	.275" X .546" (7 x 14) DUAL RG6/U	500	25
DE-1601	.312" - .315" (8 - 8) QUAD RG6/U	500	25

Consult PLP for requirements not listed.