




# Reducing Splice

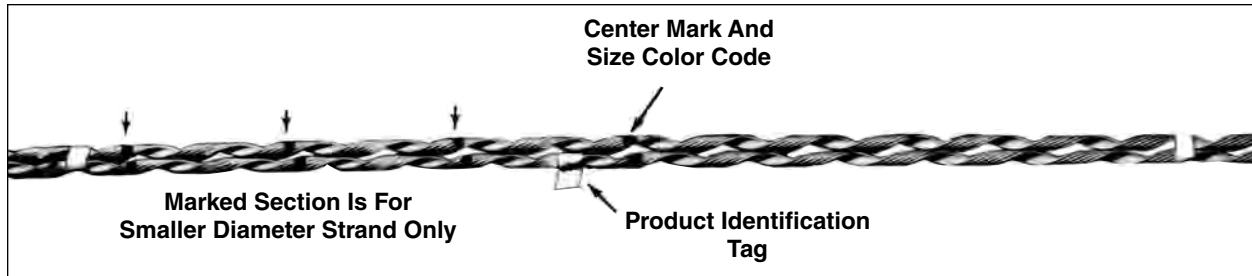

## Reducing Splice

PREFORMED™ Reducing Splices are intended to permanently join two strands of different diameters. Application by hand—no tools required—is fast, easy, uniform and can be visually checked to assure proper application. Without any loose parts, jaws to seat, or teeth to bite into the strand, the Reducing Splice is designed to permit spinner-free travel without adjusting the gates or lifting the spinner over the splice.

The PREFORMED Reducing Splice is made of material completely compatible with the strand to which it is applied and can be used in any environment.

| Galvanized Steel, C-Coat for use on Extra High Strength or Utility Grade Strands |               |       |        |                        |            |          |                            |
|--|---------------|-------|--------|------------------------|------------|----------|----------------------------|
| Catalog Number   | Standard Size |       | Length | Reduced End Color Code | Per Carton |          | Non-Reduced End Color Code |
|  | From          | To    |        |                        | Units      | Wt./Lbs. |                            |
| LSR-2122   | 5/16"         | 1/4"  | 35"    | Yellow                 | 50         | 33       | Black                      |
| LSR-2123   | 3/8"          | 5/16" | 42"    | Black                  | 25         | 25       | Orange                     |
| LSR-2124   | 7/16"         | 3/8"  | 50"    | Orange                 | 25         | 39       | Green                      |
| LSR-2125   | 3/8"          | 1/4"  | 42"    | Yellow                 | 50         | 41       | Orange                     |

**NOTE:** Left Hand Lay Standard