




RAPTOR PROTECTOR™ Platform for Extended Top-of-Pole Mount Applications

Be sure to read and completely understand this procedure before installing product. Be sure to select the proper PREFORMED™ product before installation.

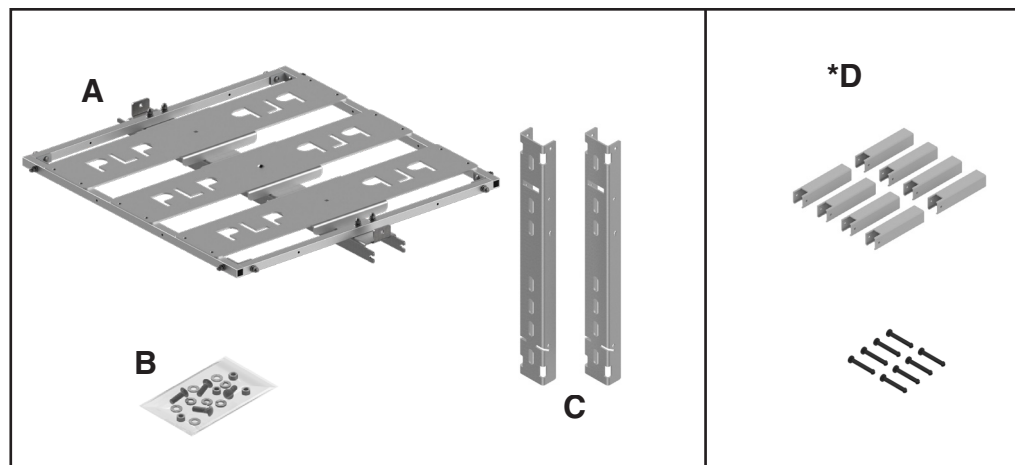

NOMENCLATURE

- A. Platform (1)
- B. Hardware Bag (1)
 - 3/8"-16 x 1-1/4" Carriage Bolts (4)
 - 3/8" Spring Lock Washers (4)
 - 3/8" Flat Washers (4)
 - 3/8"-16 Hex Nuts (4)
- C. Pole Top Extended Brackets (2)

*Optional Items:

- D. Nest Retention Post Kit (1)
 - Nest Retention Posts (8)
 - Nylon Lock Pins (8)

NOTE: For proper installation of the RAPTOR PROTECTOR™ Platform, it is recommended that the platform be grounded per company standards and practices.



RAPTOR PROTECTOR Platform Kits for Extended Top-of-Pole Mounting Applications	
PLP Catalog Number	Description
RPP33-ET	RAPTOR PROTECTOR Platform without Nest Retention Post Kit or Perch Kit
RPP33-ETNRP	RAPTOR PROTECTOR Platform with Nest Retention Post Kit (No Perch Kit)
RPP33-ETNRPP	RAPTOR PROTECTOR Platform with Nest Retention Post Kit and Perch Kit

DISCLAIMER: The RAPTOR PROTECTOR™ Platform for pole top mount has an adjustable application range and can be easily installed at the top of wooden round utility poles between 7" and 12" diameter. The RAPTOR PROTECTOR Platform will fit square wooden utility poles between 6" x 6" up to 11" x 11".


Step #1 Mount the pole top brackets to the pole using 5/8" through bolts (not supplied). Partially tighten the through bolts and leave snug until the platform is in place.




Step #2 (OPTIONAL) If using the optional nest retention posts, attach each nest retention post to the platform frame using a nylon lock pin. Push the pin all the way through the pre-drilled hole from the outside of the frame toward the inside.

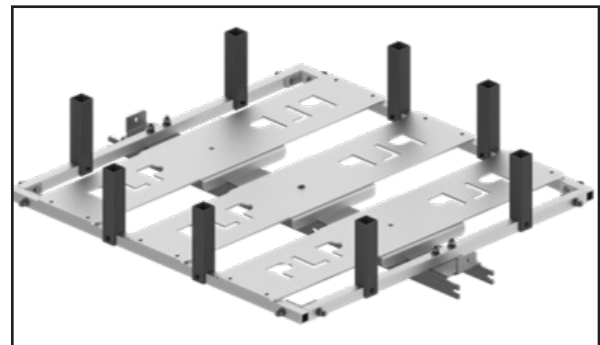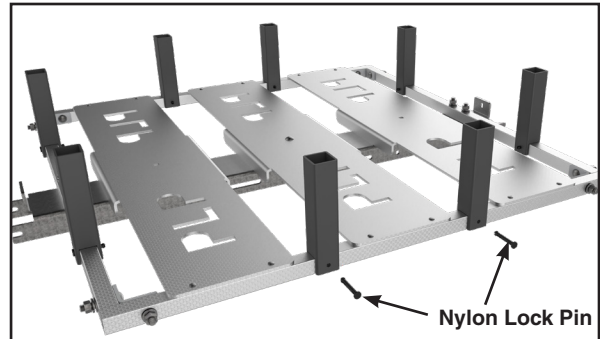


Step #3 Secure the platform to each pole top bracket with (2) carriage bolts, (2) flat washers, (2) lock washers, and (2) hex nuts as shown below. Go back and fully tighten the 5/8" through bolts (shown in Step #1).

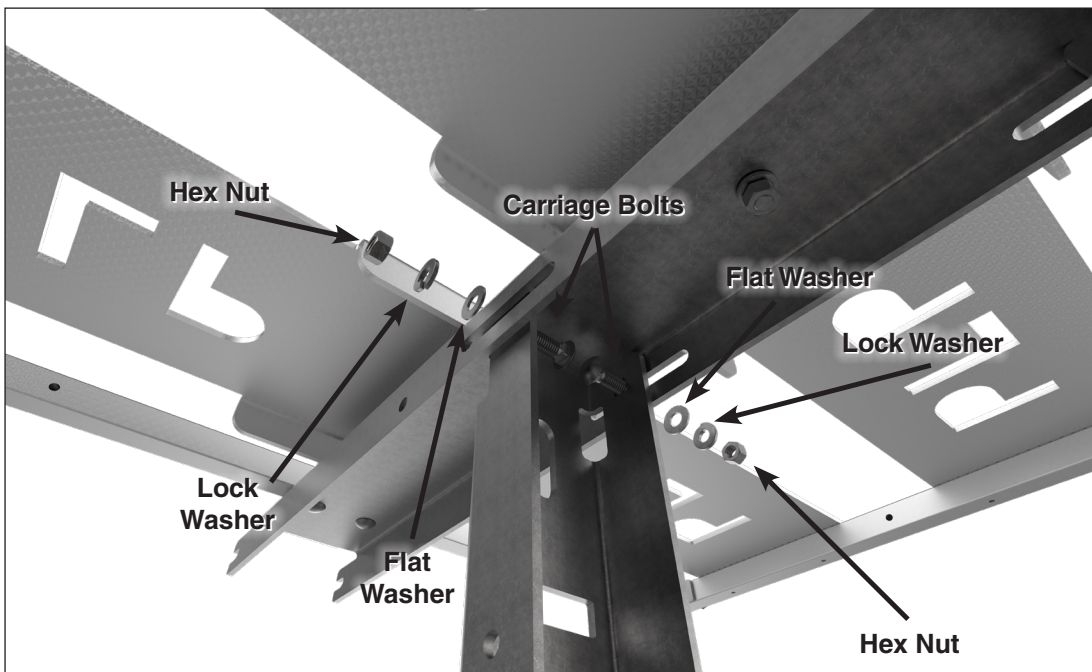

Step #4 Completed installation of the RAPTOR PROTECTOR™ Platform shown below.



Configuration shows the installation of the optional perch. The optional perch installation instructions, SP3586, can be found on our website.

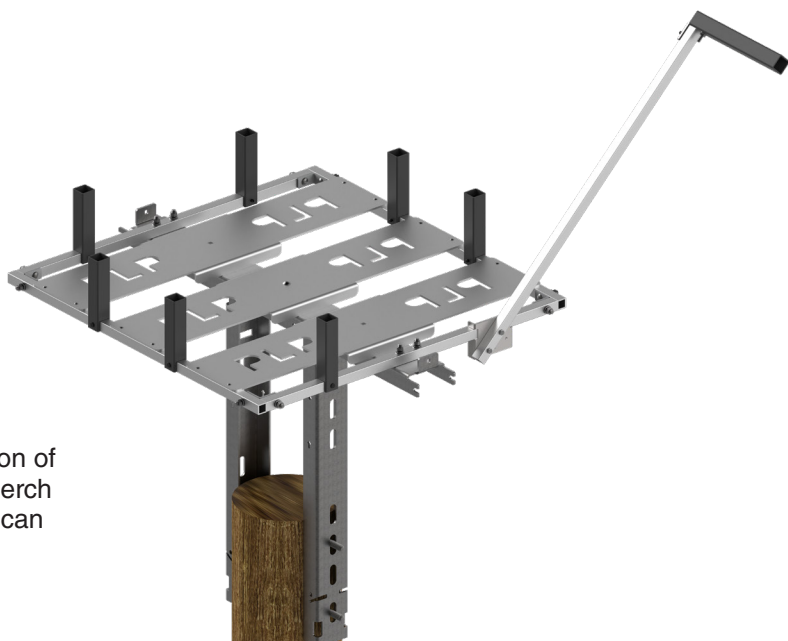

SAFETY CONSIDERATIONS

This application procedure is not intended to supersede any company construction or safety standards. This procedure is offered only to illustrate safe application for the individual.

FAILURE TO FOLLOW THESE PROCEDURES MAY RESULT IN PERSONAL INJURY OR DEATH.

This product may be removed and reinstalled during the initial installation if it is in good condition. After extended service life, it is recommended the product not be reused once removed from service.

Do not modify this product under any circumstances.

This product is intended for use by trained technicians only. **This product should not be used by anyone who is not familiar with, and not trained to use it.**

When working in the area of energized lines, extra care should be taken to prevent accidental electrical contact. Be sure to wear proper safety equipment per your company protocol.

For proper performance and personal safety, be sure to select the proper size PREFORMED™ product before application.

PREFORMED products are precision devices. To ensure proper performance, they should be stored in cartons under cover and handled carefully.



PREFORMED LINE PRODUCTS

P.O. Box 91129, Cleveland, Ohio 44101 • 440.461.5200 • www.preformed.com • e-mail: inquiries@preformed.com

SP3420-3