


APPLICATION PROCEDURE & SAFETY CONSIDERATIONS **PREFORMED** LINE PRODUCTS

OPEN WIRE DEAD-END



Be sure to completely read and understand this procedure before applying product.

[Be sure to select the proper size PREFORMED product before application]

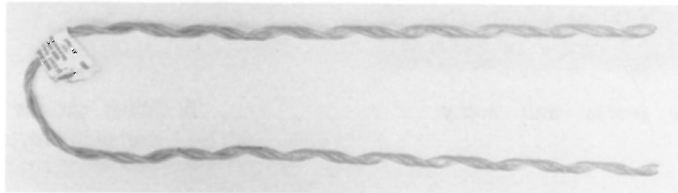

1. Dead-end as received by lineman in field. Tags indicate proper size and material. Crossover marks aid in application and identification.



2. Tension wire properly and match loop of dead-end to insulator.




3. Completely apply either leg to wire by rotating the leg out and away from wire.



4. First leg completely applied.



5. Insert free leg of dead-end.....

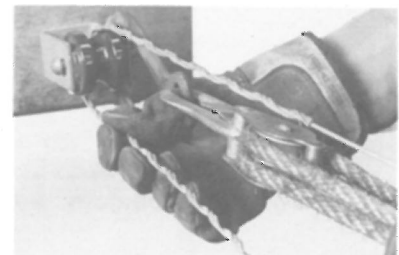

6.through insulator.