



LASHING ROD

Be sure to read and completely understand this procedure before applying product. Be sure to select the proper size PREFORMED™ product before application.



PREFORMED™ LASHING ROD

SINGLE ROD APPLICATION

Step #1 Start the application by placing the end of the Lashing Rod as close to the loop of the dead end as possible and begin to wrap on in a clockwise direction. Wrap on the entire length of the Lashing Rod.



Step #2 Complete the application by snapping the rod end into place with light thumb pressure.



Step #3 Position the second Lashing Rod so that it overlaps the previously applied rod by one pitch length, as shown below, and apply in the same manner.



Step #4 Continue to wrap on the second Lashing Rod and snap the end into place with light thumb pressure. Repeat for the required lashing length.



DOUBLE ROD APPLICATION

Step #1 Start the application as described for single rod. Position the end of the second Lashing Rod as close to the loop of the dead end as possible, and directly opposite the end of the first Lashing Rod, as shown.




Step #3 Position the third Lashing Rod so that it overlaps the previously applied pair by one pitch length, as shown below.



Step #2 Begin to wrap on the second Lashing Rod in a clockwise direction in the same manner as the first Lashing Rod. Continue to wrap on, and complete the application by snapping the end into place with light thumb pressure.



Step #4 Then, begin to apply the fourth rod in the same manner as the third rod within the remaining space. Continue the double application for the required lashing length.

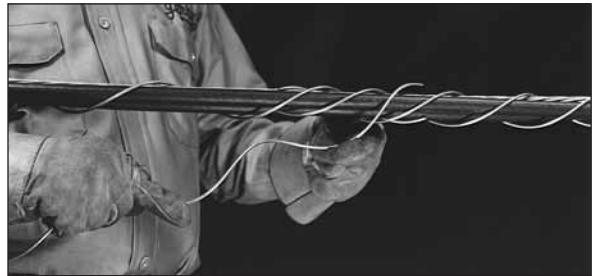

SAFETY CONSIDERATIONS

This application procedure is not intended to supersede any company construction or safety standards. This procedure is offered only to illustrate safe application for the individual.

FAILURE TO FOLLOW THESE PROCEDURES MAY RESULT IN PERSONAL INJURY OR DEATH.

This product is intended for a single (one time) use and for the specified application. **Do not reuse or modify this product under any circumstances.**

This product is intended for use by trained technicians only. **This product should not be used by anyone who is not familiar with, and not trained to use it.**

When working in the area of energized lines, extra care should be taken to prevent accidental electrical contact.

For proper performance and personal safety, be sure to select the proper size PREFORMED™ product before application.

PREFORMED products are precision devices. To insure proper performance, they should be stored in cartons under cover and handled carefully.



PREFORMED LINE PRODUCTS

P.O. Box 91129, Cleveland, Ohio 44101 • 440.461.5200 • www.preformed.com • e-mail: inquiries@preformed.com

SP2085-2